WESTERBEKE™

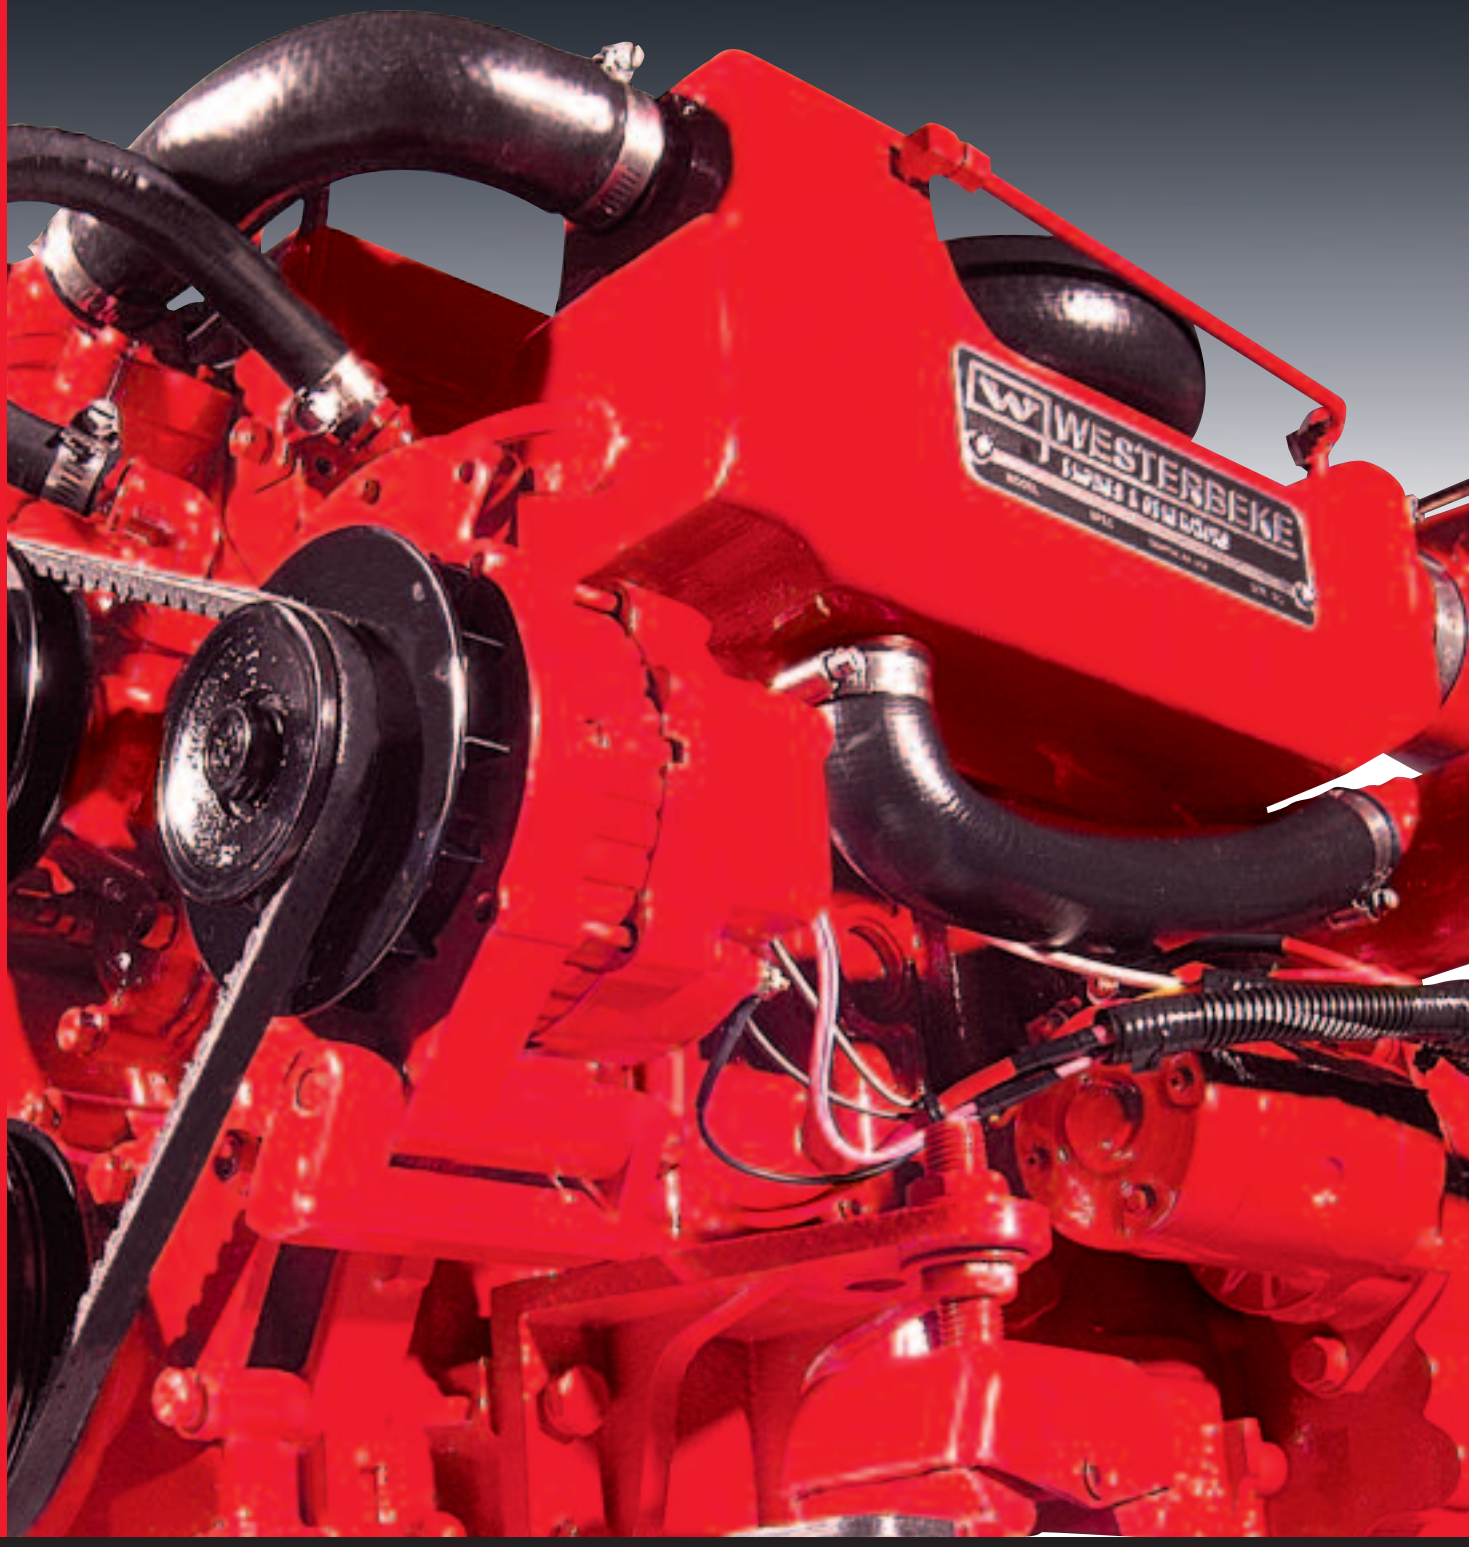

Westerbeke Marine Engines & Generators

Universal Marine Engines

Rotary Aire Marine Climate Control Systems

Pleasure, power and peace of mind

Westerbeke Marine Diesel Generator Sets

For the Leisure and Professional Boating Industry, Westerbeke produces high quality marine generating sets from 4kW up to 80kW at 50 Hertz and 5kW up to 95kW at 60 Hertz.

Westerbeke 1500/1800-rpm diesel generators are backed by a 5-year limited warranty. The presence of Westerbeke in over 65 countries around the world provides customers with easy access to parts and technical support.

Established in 1937, Westerbeke is committed to providing its customers with quality products and unequaled after sales support.

Gold Medal Performance comes in Westerbeke Red

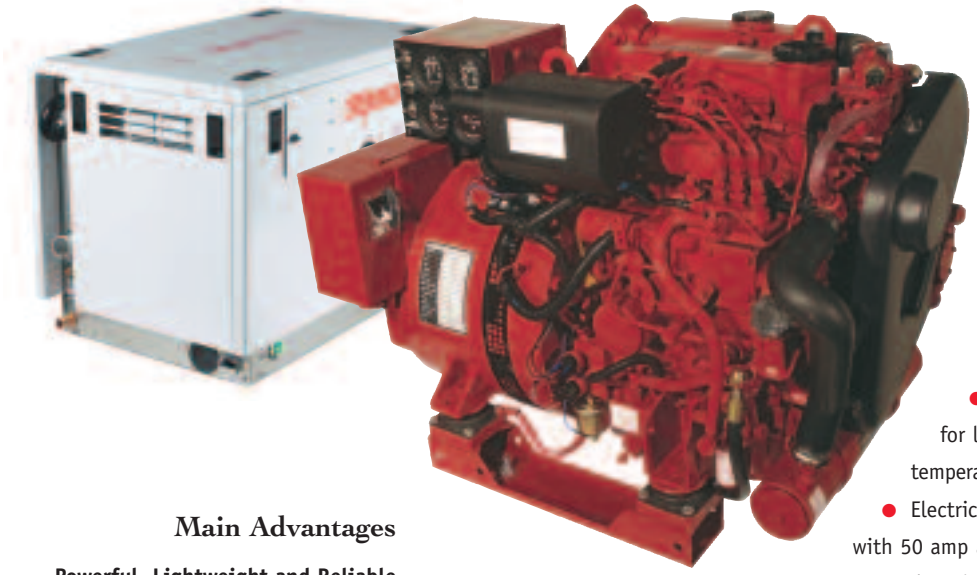

Main Advantages

Powerful, Lightweight and Reliable
Quiet and Compact
Easy Operation and Maintenance
Five year Limited Warranty
User Friendly Remote Control Panel
Worldwide Service Network

Standard Features

- Optimum accessibility
- Fresh-water cooling
- Water injected exhaust elbow helps reduce exhaust noise and cools exhaust system
- Automatic safety shut-down for low oil pressure, high coolant temperature and high exhaust temperature
- Electrical system 12V, negative ground with 50 amp alternator (above 4/5kW)
- Generator and engine are pre-wired for easy installation including "plug in" connection for remote engine instrument panel or start-stop panel
- AC output circuit breaker protection (single phase) up to 25/32kW
- Full torque power take-off
- Operators' manual and parts list
- "CE" mark

WESTERBEKE™
Engines & Generators

Optional Equipment

● Sound Guard ● Sound Guard **SST** - up to 25/32kW ● Keel cooling ● Remote start/stop panel ● 15' & 30' connectable panel ext. harness (up to 60'/18.3m) ● Dual station engine instrument panel with senders ● Ship shore switch ● Power take-off adapter kit, 4/5kW - 12/15kW ● PTO with electric clutch, 16/20kW - 55/65kW ● Fuel/water separator ● Hydro hush muffler and fittings ● Spare part kits ● Anti siphon valve for overboard cooling discharge water ● Technical manuals

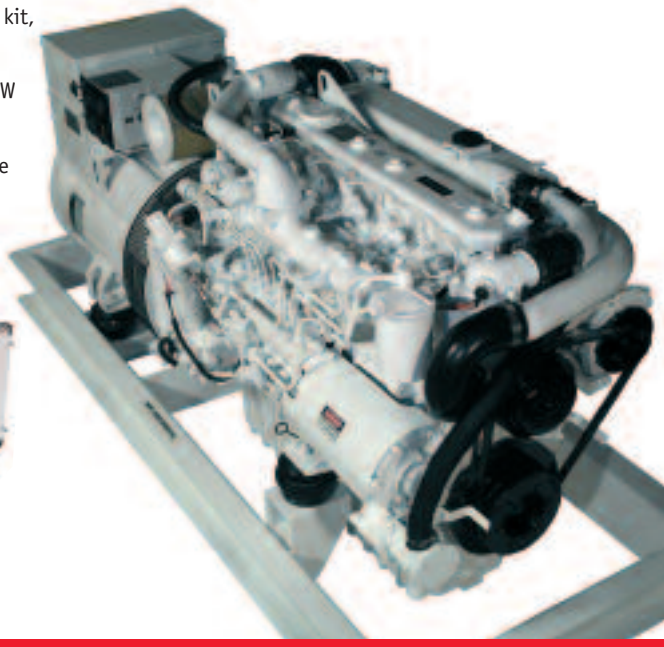

Technical Data

Type		5 BCDB	4 BCDB	7.6 BTD	5.7 BTD	8 BTDA	6 BTDA	10.0 BTDA	7.5 BTDA	12.5 BTDB	9.4 BTDB	12.6 BTD	10.4 BTD	15 BTDC	12 BTDC	20 BEDA	16 BEDA
Output	kW	5	4	7.6	5.7	8	6	10	7.5	12.5	9.4	12.6	10.4	15	12	20	16
Cylinders		3		3		3		3		4		3		4		4	
Speed	RPM	1800	1500	1800	1500	1800	1500	1800	1500	1800	1500	1800	1500	1800	1500	1800	1500
Voltage	V	120	230	120/240	230	120/240	230	120/240	230	120/240	230	120/240	230	120/240	230	120/240	230
Frequency	Hz	60	50	60	50	60	50	60	50	60	50	60	50	60	50	60	50
Powerfactor		1.0		1.0		1.0		1.0		1.0		1.0		1.0		1.0	
Standard Phase		1		1		1		1		1		1		1		1	
Optional Phase		No		No		No		3		3		3		3		3	
Dimensions,		GEN	W/SST	GEN	W/SST	GEN	W/SST	GEN	W/SST	GEN	W/SST	GEN	W/SST	GEN	W/SST	GEN	W/SST
Length	inch	27.8	33.3	28.2	33.3	28.4	36.1	31.5	36.1	35.0	39.5	31.5	36.1	35.0	39.5	46.1	49.6
Width	inch	16.6	21.1	19.0	21.1	18.6	23.2	19.1	23.2	19.0	23.2	19.1	23.2	19.0	23.2	25.3	27.2
Height	inch	20.7	22.3	20.7	22.3	24.0	25.3	24.0	25.3	24.0	25.3	24.0	25.3	24.0	25.3	28.9	30.8
Dry Weight	lbs	336	407	395	466	467	550	513	596	561	648	513	596	569	656	943	1077
Length	mm	706	846	716	846	722	917	800	917	889	1003	800	917	889	1003	1169	1260
Width	mm	422	536	483	536	473	589	485	589	483	589	485	589	483	589	643	691
Height	mm	526	566	526	566	610	643	610	643	610	643	610	643	610	643	734	782
Dry Weight	kg	152.4	184.6	179.2	202.3	211.8	249.5	232.7	270.3	254.5	293.9	232.7	270.3	258.1	297.6	427.7	488.5

CENTURY SERIES GENERATORS

Type		25 BED	20 BED	32 BED	25 BEDA	40 BEDA	30 BEDA	45 BEDA	35 BEDA	60 BEDA	45 BEDA	60 BEDA	50 BEDA	70 BEDA	60 BEDA	95 BEDA	80 BEDA
Output	kW	25	20	32	25	40	30	45	35	60	45	60	50	70	60	95	80
Cylinders		4		4		4		4		4		6		6		6	
Speed	RPM	1800	1500	1800	1500	1800	1500	1800	1500	1800	1500	1800	1500	1800	1500	1800	1500
Voltage	V	120/240	230	120/240	230	120/240	230	120/240	230/400	120/240	230/400	120/240	230	120/240	230/400	120/240	230/400
Frequency	Hz	60	50	60	50	60	50	60	50	60	50	60	50	60	50	60	50
Powerfactor		1.0		1.0		1.0		0.8		0.8		1.0		0.8		0.8	
Standard Phase		1		1		1		3		3		1		3		3	
Optional Phase		3		3		No		No		No		No		No		No	
Dimensions,		GEN	W/SST	GEN	W/SST	GEN	W/SG	GEN	W/SG	GEN	W/SG	GEN	W/SG	GEN	W/SG	GEN	W/SG
Length	inch	46.1	49.6	45.4	49.6	62.5	62.5	62.5	62.5	62.5	62.5	74.9	74.9	74.9	74.9	74.9	74.9
Width	inch	25.3	27.2	24.1	27.2	30.6	30.6	30.6	30.6	30.6	30.6	30.6	30.6	30.6	30.6	30.6	30.6
Height	inch	28.9	30.8	29.2	30.8	33.7	36.6	33.7	36.6	33.7	36.6	34.2	36.6	34.2	36.6	34.2	36.6
Dry Weight	lbs	971	1105	1038	1172	1646	1758	1601	1713	1646	1758	2100	2227	1995	2122	2100	2227
Length	mm	1169	1260	1153	1260	1588	1588	1588	1588	1588	1588	1903	1903	1903	1903	1903	1903
Width	mm	643	691	612	691	778	778	778	778	778	778	778	778	778	778	778	778
Height	mm	734	782	742	782	855	929	855	929	855	929	869	929	869	929	869	929
Dry Weight,	kg	440.4	501.2	470.8	531.6	746.6	797.4	726.2	770.0	746.6	797.4	952.5	1010.2	904.9	962.5	952.5	1010.2

Specifications subject to change without notice.

***GEN** GENERATOR* ***SST** with SOUNDGUARD SST*
***SG** with SOUNDGUARD*

NMMA Innovation Award Winner

WESTERBEKE GENERATORS SAFE CO SERIES

Ultra-Low Carbon Monoxide Emissions

Pleasure, power and peace of mind

Gasoline

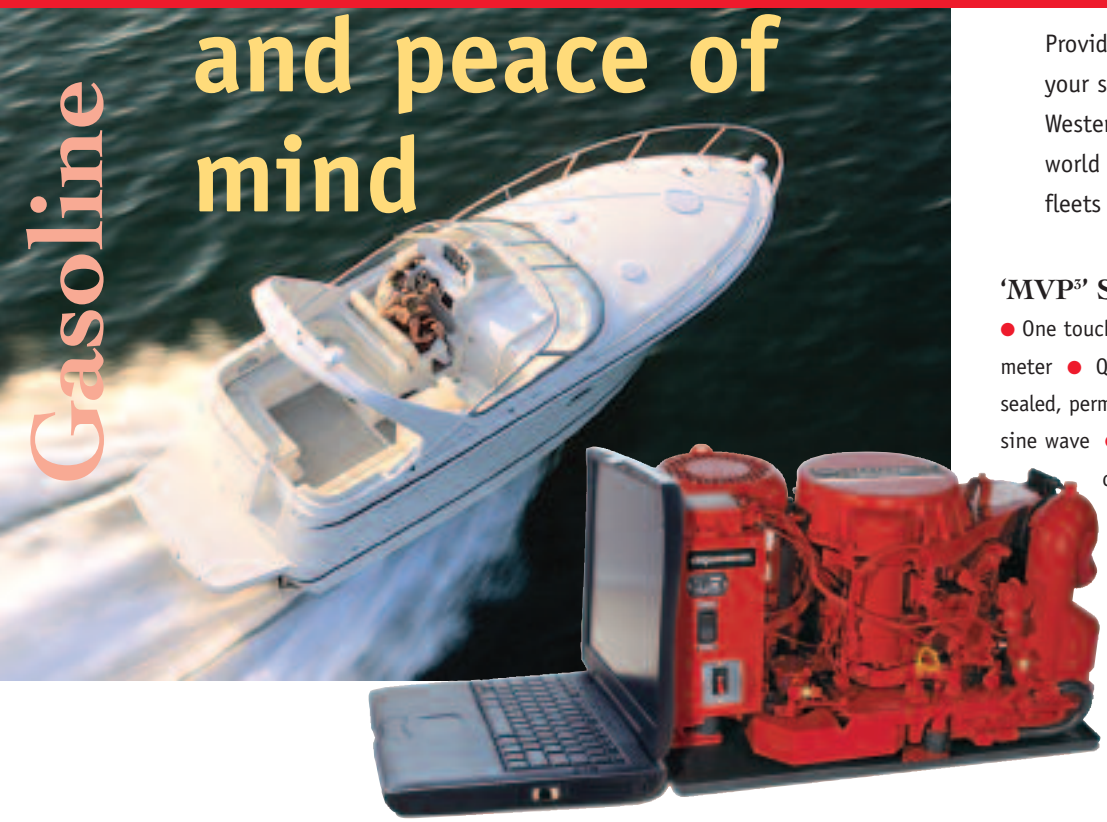

Westerbeke Marine Gasoline Generator Sets now available with Safe-CO™ technology

Providing all the comforts of home for your small pleasure craft or houseboat, Westerbeke gasoline generators are world renowned among houseboat rental fleets and small craft owners' alike.

'MVP³' Standard Equipment

● One touch start/stop control panel with running hour meter ● Quiet, 2200-rpm operation ● Completely sealed, permanent magnet generator ● "Utility grade" sine wave ● Electronic governing ● 11 amp battery charger ● AC circuit breaker ● Overspeed protection ● Safety shut-downs - low oil pressure & high exhaust temperature ● Water injected exhaust elbow ● Belt-driven raw water pump ● Belt guards ● Lube oil drain hose ● Vibration isolators ● Operators' manual & parts list ● "CE Mark" ● EPA & CARB certified ● Meets U.S.C.G. regulation 33CFR-183

'MVP³' Generator

NMMA Innovation Award Winner

Westerbeke's 3.0 BPMG, nicknamed 'MVP³' is currently the most compact gasoline generator and features the new *one touch* start/stop.

'Safe-CO™' models

Standard Equipment, in addition, includes:

● One touch start/stop control panel with hourmeter as well as oil pressure, engine & exhaust temperature and overspeed indicator lights.* ● Safe-CO™ technology (more than 99% carbon monoxide reduction) ● Electronic fuel injection (EFI)

**Safe-CO™ panel offered instead of standard 'low profile' or 'MVP³' panel.*

Quietly Leading the Way

'Low Profile' Generators

Westerbeke's 'Low Profile' BCG and BCGD generators are the smallest gasoline units on the market when compared with generators of the same kilowatt. These 3-cylinder, 1500/1800-rpm "Low Profile" generators are smaller and quieter than 2-cylinder, 3000/3600-rpm competitors.

Westerbeke also doesn't require a sound shield to be quieter than the competition.

'Low Profile' Standard Equipment

● Simple start/stop control panel with running hour meter ● Quiet, 1500/1800-rpm operation ● Field adjustable to 50 or 60Hz ● Electronic voltage regulation ● Electronic governing ● 17 amp battery charger ● AC circuit breaker ● Overspeed protection ● Safety shut-downs - high coolant temperature, low oil pressure & high exhaust temperature ● Water injected exhaust elbow ● Fresh water cooling & coolant recovery tank ● Belt-driven, raw water pump ● Belt guard ● Lube oil drain hose ● Vibration isolators ● Operators' manual & parts list ● "CE Mark" ● EPA & CARB certified ● Meets U.S.C.G. regulation 33CFR-183

WESTERBEKE™ Engines & Generators

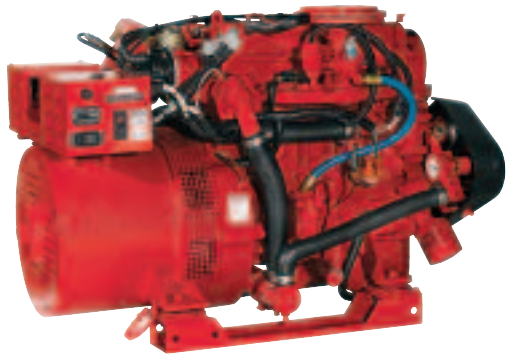

'Houseboat Series' Generators

Now available with Safe-CO™ technology, Westerbeke's **'Houseboat Series'** gasoline generators boast a reputation for reliability, innovation and peace of mind that extends from North America to Australia among houseboat rental fleets. Running at a slow and quiet 1500/1800-rpm, these generators are virtually forgotten in your houseboat so you can feel at home on the water.

Standard Equipment

● Simple start/stop control panel with running hour meter ● Quiet, 1500/1800-rpm operation ● Field adjustable to 50 or 60Hz ● Electronic voltage regulation ● 50 amp battery charging alternator ● AC circuit breaker ● Overspeed protection ● Safety shut-downs - high coolant temperature, low oil pressure & high exhaust temperature ● Water injected exhaust elbow ● Fresh water cooling & coolant recovery tank ● Belt-driven, raw water pump ● Belt guard ● Lube oil drain hose ● Vibration isolators ● Operators' manual & parts list ● EPA & CARB certified ● Meets U.S.C.G. regulation 33CFR-183

'Safe-CO™ Houseboat Series'

Standard Equipment, in addition, includes:

● One touch start/stop control panel with hourmeter as well as oil pressure, engine & exhaust temperature and overspeed indicator lights* ● Safe-CO™ technology (more than 99% carbon monoxide reduction) ● Electronic fuel injection (EFI) ● Electronic governing

**Safe-Co™ panel offered instead of standard 'Houseboat Series' panel.*

Technical Data

Type:	3.0 BPMG*	5.0 BCG	4.2 BCG	7.0 BCGD	5.8 BCGD	8.0 BEG	6.4 BEG	10.0 BEG	8.0 BEG	12.5 BEG	10.0 BEG	15.0 BEG	12.0 BEG	20.0 BEG	16.0 BEG	25.0 BEG	20.0 BEG
Output kW	3.0	5.0	4.2	7.0	5.8	8.0	6.4	10.0	8.0	12.5	10.0	15.0	12.0	20.0	16.0	25.0	20.0
Cylinders	2	3		3		4		4		4		4		4		4	
Speed RPM	2200	1800	1500	1800	1500	1800	1500	1800	1500	1800	1500	1800	1500	1800	1500	1800	1500
Voltage V	120 230	120	230	120	230	1800	230	120/240	230	120/240	230	120/240	230	120/240	230	120/240	230
Frequency Hz	60 50	60	50	60	50	60	50	60	50	60	50	60	50	60	50	60	50
Power factor	1	1		1		1		1		1		1		1		1	
Standard phase	1	1		1		1		1		1		1		1		1	
Dimensions,																	
Length inches	24.6	25.2		26.2		32.6		33.8		34.8		36.1		42.0		42.0	
Width inches	13.6	15.4		15.5		20.8		20.8		20.8		20.8		23.4		23.4	
Height inches	14.5	16.9		16.7		23.5		23.5		23.5		23.5		28.2		28.2	
Length mm	625	640		666		828		859		884		917		1067		1067	
Width mm	345	391		394		528		528		528		528		594		594	
Height mm	368	429		424		597		597		597		597		716		716	
Dry weight lbs	165	307		336		440		466		497		525		711		739	
Dry weight kg	74.8	139.3		152.4		199.6		211.4		225.4		238.1		322.5		335.2	

**3.0 BPMG not field convertible.*

SAFE-CO™ GASOLINE GENERATORS *with Electronic Fuel Injection*

Type:	3.0 SBPMG*	5.0 SBCG	4.2 SBCG	6.5 SBCG	5.4 SBCG	8.0 SBEG	6.4 SBEG	10.0 SBEG	8.0 SBEG	12.5 SBEG	10.0 SBEG	14.0 SBEG	11.6 SBEG	20.0 SBEG	16.0 SBEG	22.5 SBEG	18.7 SBEG
Output kW	2.7	5.0	4.2	6.5	5.4	8.0	6.4	10.0	8.0	12.5	10.0	14.0	11.6	20.0	16.0	22.5	18.7
Cylinders	2	3		3		4		4		4		4		4		4	
Speed RPM	2200	1800	1500	1800	1500	1800	1500	1800	1500	1800	1500	1800	1500	1800	1500	1800	1500
Voltage V	120 230	120	230	120	230	120/240	230	120/240	230	120/240	230	120/240	230	120/240	230	120/240	230
Frequency Hz	60 50	60	50	60	50	60	50	60	50	60	50	60	50	60	50	60	50
Power factor	1	1		1		1		1		1		1		1		1	
Standard phase	1	1		1		1		1		1		1		1		1	
Dimensions,																	
Length inches	26.0	26.3		27.8		32.6		33.8		34.8		36.6		42.3		42.3	
Width inches	13.4	17.5		17.5		21.7		21.7		21.7		21.7		22.5		22.5	
Height inches	14.3	16.9		16.9		25.1		25.1		25.1		25.1		27.9		27.9	
Length mm	660	668		706		828		859		884		930		1074		1074	
Width mm	340	445		445		551		551		551		551		572		572	
Height mm	363	429		429		597		597		597		597		716		716	
Dry weight lbs	165	320		350		455		480		512		540		725		755	
Dry weight kg	74.8	145.2		158.8		206.4		217.7		232.2		244.9		328.9		342.5	

**3.0 SBPMG not field convertible.*

Specifications subject to change without notice.

Cool. Warm. Dry. All at your fingertips

Westerbeke Airconditioning Systems

Enjoy the luxury of a cool comfortable cabin in your boat even on the hottest summer day. Instant air conditioning at your fingertips.

Quick, quiet cooling in hot weather, warmth in cold weather

An added feature, the Rotary Aire Marine Climate Control System by Westerbeke also allows you to warm the cabin with a push of a button. Perfect for warming a cabin on cool nights, or for those extreme spring/autumn temperature changes.

The Rotary Aire Marine Climate control System also acts as a very efficient dehumidifier. It can be set to automatically remove excess humidity from the cabin even when the boat is left closed up for long periods of time, eliminating the oppressive stickiness and damp mustiness common on boats.

WESTERBEKE™
Engines & Generators

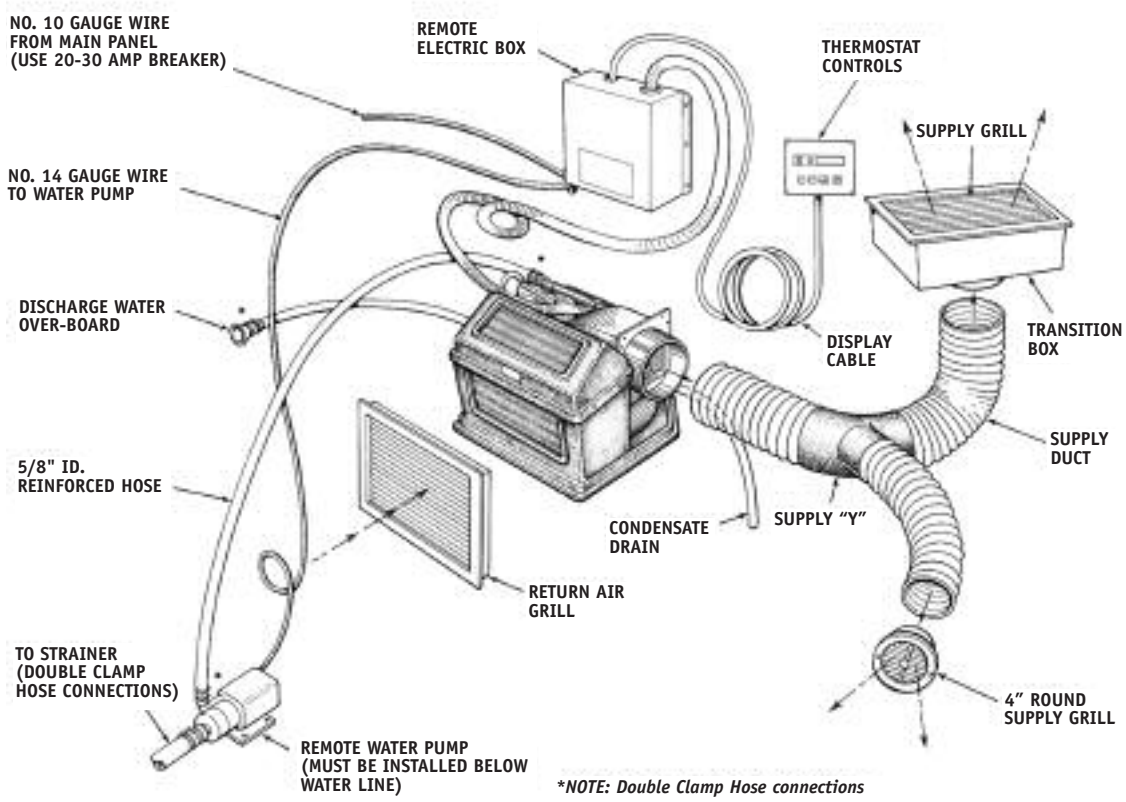
NO. 10 GAUGE WIRE FROM MAIN PANEL (USE 20-30 AMP BREAKER)
REMOTE ELECTRIC BOX
THERMOSTAT CONTROLS
SUPPLY GRILL
NO. 14 GAUGE WIRE TO WATER PUMP
DISCHARGE WATER OVER-BOARD
DISPLAY CABLE
TRANSITION BOX
SUPPLY DUCT
5/8" ID. REINFORCED HOSE
CONDENSATE DRAIN
SUPPLY "Y"
RETURN AIR GRILL
TO STRAINER (DOUBLE CLAMP HOSE CONNECTIONS)
4" ROUND SUPPLY GRILL
REMOTE WATER PUMP (MUST BE INSTALLED BELOW WATER LINE)
*NOTE: Double Clamp Hose connections

System Layout

Provides Boat Owners with Year Round Comfort

All-weather comfort at your fingertips

For over 65 years, Westerbeke Corporation has been manufacturing world-class marine products. Westerbeke marine generators and engines are standard equipment on boats built by many of the world's leading boat builders. Thousands of "Westerbekes" have been in faithful service over the past century. Rotary Aire Marine Climate Control System is the technical result of that marine experience. A state-of-the-art system, remarkably quiet and efficient, designed to provide the boat owner with the ultimate in personal comfort.

Technical Data

		Model 10,000	Model 17,000
Cooling capacity (BTU)		10,000	17,000
Starting Amps – 220Volt 50Hz.		14	17.5
Running Amps		4.5 (Cooling mode)	5.0 (Cooling mode)
		6.0 (Heating mode)	6.5 (Heating mode)
Starting Amps – 120Volt 60Hz.		21	26
Running Amps		8.0 (Cooling mode)	10.0 (Cooling mode)
		10.0 (Heating mode)	12.0 (Heating mode)
Net weight		55 lbs (25kg)	63 lbs (29kg)
Refrigerant (R22)		9 oz (0.38)	13 oz (0.48)
Evaporator Coil		Full Flow "V" Design	
Housing Construction		ABS Plastic	
Compressor		Rotary, only 3 moving parts	
Condensing Coil		Copper nickel	
Sea water flow	(LPH)	1136 minimum	1893 minimum
	(GPH)	300 minimum	500 minimum
Limited Warranty		Two years	
Dimensions LxWxH	(inches)	20.50x13.75x13.25	21.25x16.50x13.50
	(mm)	521x350x337	540x420x343
Remote control box LxWxH	(inches)	6.5x6.75x2.5	
	(mm)	165x172x64	

Specifications subject to change without notice.

High torque low rpm

Westerbeke Marine Propulsion engines

State-of-the-Art Marine Propulsion

With over 65 years experience with marine diesel engines and a support network that's unmatched, it's easy to see why Westerbeke is still the prevailing leader in marine diesel engines. Exclusively designed for marine applications, these engines represent a breakthrough in compactness, quietness, and reliability. Backed by a five-year limited warranty and used by the most prestigious auxiliary sailboat builders, thousands of engines have been installed in boats for pleasure, commercial and government use.

The Legend Continues

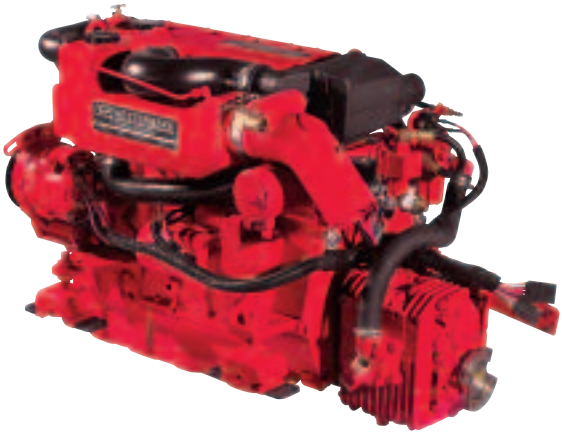

Dedication to Service

Westerbeke has managed to incorporate over 65 master distributors and their dealers worldwide to assist in the service of our quality products. Our distributors and dealers are dedicated to the consistent evolution of our product line as well as making sure that every customer is taken care of in the most efficient way possible. Whether it's parts, warranty, or technical service, you will always find a local Westerbeke distributor or dealer close by who can help.

Product Line

You can choose from thirteen Westerbeke diesel models and five Universal diesel models ranging from 12 to 170 HP

WESTERBEKE
Engines & Generators

Standard Equipment

Fresh water cooling ● Engine pre-wired to plug-in connection ● Self-bleeding fuel system on most Westerbeke models ● Domestic hot water connection ● 12V, 50 amp alternator ● Coolant recovery tank ● Throttle, shift and control brackets ● Low oil pressure & high water temperature alarms ● Transmission ("Century Series" optional transmission) ● Glow plug cold starting aid (90A Four-air intake heater) ● Engine matched, four point, fail-safe adjustable mounts ● Circuit breaker protected electrical system ● Lube oil drain hose ● Operators' manual & parts list

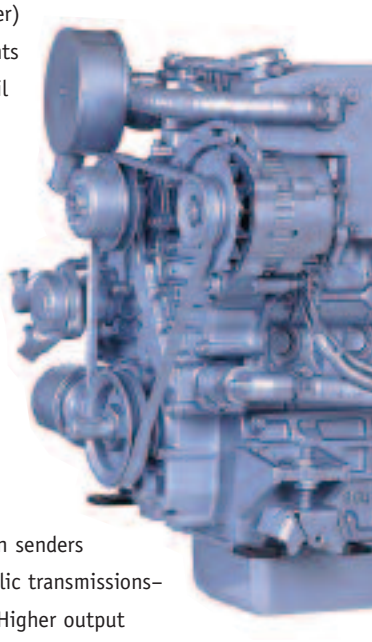

Continuous Quality Power

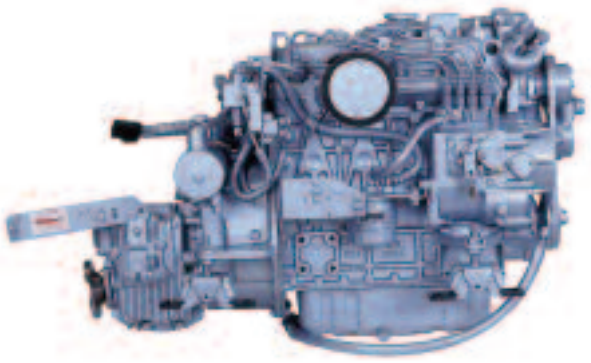

Optional Equipment

Captain panel with alarms (tachometer with lights) ● Admiral panel with alarms (tachometer with gauges) ● 15 foot (4.6 meter) extension harness ● Dual station senders ● Other gear ratios–consult local distributor ● Hydraulic transmissions–consult local distributor ● Remote expansion tank ● Higher output alternator in place of standard on most models ● Muffler and fittings ● Water injected exhaust elbows -45° deg., 90° deg. ● Anti-siphon valve for overboard cooling discharge water ● Propeller shaft couplings (rigid/flexible) available standard sizes ● "A" on board spare parts kit ● "B" extended cruising spare parts kit ● Technical Manual

Technical Data

Type	12C Two	20B Two	30B Three	35D Three	44B Four	55C Four	64A Four
Power Output	12HP-8.9kW	18HP-13.4kW	27HP-20.1kW	31HP-23.0kW	44HP-32.0kW	55HP-41.0kW	64HP-47.0kW
Speed, RPM	3000	3600	3600	3000	3000	3000	2600
Cylinders	2	2	3	3	4	4	4
Aspiration	N	N	N	N	N	N	N
Displacement, l	0.65	0.65	0.95	1.32	1.76	2.18	2.98
cu in	39	39	58	80	107	133	182

					CENTURY	CENTURY
Type	71C Four	82B Four	90A Four	108C Six	120-T4A	170-T6A
Power Output	71HP-52.9kW	82HP-61.1kW	90HP-67.0kW	108HP-80.5kW	120HP-89.0kW	170HP-127.0kW
Speed, RPM	3600	3600	3600	3600	2500	2200
Cylinders	4	4	4	6	4	6
Aspiration	N	N	N	N	T	T
Displacement, l	2.50	2.98	3.50	4.05	4.30	6.50
cu in	154	182	211	247	264	396

	UNIVERSAL				
Type	M3-20B*	M-25XPB*	M-35B*	M-40B*	M-50B
Power Output	20HP-15kW	26HP-19kW	35HP-26kW	37.5HP-27kW	42HP-31kW
Speed, RPM	3600	3000	3000	3000	2800
Cylinders	3	3	4	4	4
Aspiration	N	N	N	N	N
Displacement, l	0.72	1.00	1.34	1.50	1.86
cu in	44	61	82	91	113

*Atomic 4 replacement models/*Specifications subject to change without notice.*

Parts Kits

Quality

Westerbeke Spare Parts and Hose Kits are packed with genuine replacement parts for your engine or generator.

Value

More for your money. Less than buying parts separately.

Assurance

Backed by our 1 year limited parts and accessories warranty.

Hose Kits

Quality

Westerbeke Spare Parts and Hose Kits are packed with genuine replacement parts for your engine or generator.

Value

More for your money. Less than buying parts separately.

Assurance

Backed by our 1 year limited parts and accessories warranty.

Cooling Hose Kit

- Thermostat to Manifold
- Sea Water Pump to Exchanger
- Exchanger to Fresh Water Pump
- Manifold to Exchanger
- Hose Clamps
- Hoses may vary depending on model

To order hose kits, please contact a distributor in your area. You can locate your distributor by using the Distributor Search on the left panel of the website.

Diesel Engines and Generators

Kit A

- Kit A Zinc (2)
- Heat Exchanger gasket
- Fuel Elements (2)
- Oil Filter
- Belt
- Fuel Hardware Kit
- Impeller and Gasket Kit

Kit B

- Zinc (2)
- Heat Exchanger Gasket
- Fuel Elements (2)
- Oil Filter
- Belt
- Fuel Hardware Kit
- Impeller and Gasket Kit
- Glow Plug
- Thermostat
- Injector
- Sea Water Pump Kit
- Complete Gasket Set

Gasoline Engines and Generators

Kit A

- Zinc (2)
- Heat Exchanger Gasket
- Oil Filter
- Belt(s)
- Impeller and Gasket Kit
- Rotor
- Spark Plugs
- *Condenser
- *Contact Set (Points)

Kit B

- Zinc (2)
- Heat Exchanger Gasket
- Oil Filter
- Belt(s)
- Impeller and Gasket Kit
- Oil Pressure Switch
- Rotor
- Spark Plugs
- Complete Gasket Set
- Thermostat
- Sea Water Pump Kit
- PCV Valve
- *Bridge Rectifier
- *Condenser
- *Contact Set (Points)

** Not applicable to all models. To order parts kits, please contact a distributor in your area. You can locate your distributor by using the Distributor Search on the left panel of the website.*

WESTERBEKE™
Engines & Generators

Sound Guard **SST**

Strong, silent, timesaving, & made of the finest materials, the Westerbeke Sound Guard SST is designed for rugged service and is easy to install.

Features:

- **Quiet.** The SST further reduces sound intensity up to 50 percent.
- **Serviceability.** The standard of the industry for serviceability, all 5 panels can be removed in a snap. Only 2 latches per side panel & 4 per top panel. Two access doors also provided on service side panel.
- **Pre-Connected for easy installation.** Base and frame contain bulkhead fittings for all the generator's external connections including the raw water line, siphon break, fuel lines, exhaust line, AC wiring, and battery cables.
- **High quality corrosion resistant materials.** Five easy to clean, lightweight, aluminum powder coated panels supported by a stainless steel base and frame for exceptional corrosion resistance. (Base also serves as a drip tray.)
- **Sturdy.** Stainless steel base and frame provide extra sturdiness.
- **Stylish appearance.**
- **No base latches required to secure panels to base.**
- **Extra space to run fuel lines & cables, etc.** Base is shorter and thinner than side and end panels.

WHY WESTERBEKE?

You have many choices when it comes to deciding which brand of engine, generator or air conditioner to buy, and today's technology empowers manufacturers to provide good solid products.

What separates Westerbeke from other brands?

Westerbeke is dedicated to marine-since 1937.

Westerbeke offers the most comprehensive line of engines and generators-we have what you need.

Westerbeke is committed to and driven by customer satisfaction-our #1 priority.

Westerbeke is engineered for reliability-we know the marine environment and design products to provide the service our customers expect.

Westerbeke has an unsurpassed worldwide service network-our Master Distributor and dealer network is second to none-we support what we sell.

Westerbeke stands behind its products with outstanding warranty coverage-peace of mind.

NMMA Innovation Award Winner Two Consecutive Years

Westerbeke Corporation
Myles Standish Industrial Park
150 John Hancock Road, Taunton, MA 02780-7319 USA
Tel (508) 823-7677 Fax (508) 884-9688
www.westerbeke.com